




**EMT Type Available    Material:malleable iron available**

**Ⓢ Rigid Conduit Body - LB Type**


**Standard:** UL 514A and CSA C22.2. No. 18.1-13  
**Material:** Aluminum  
**Application:**for rigid conduit or IMC,allow access for inspection,pulling and maintenance

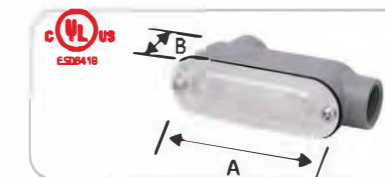

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-LB01	1/2"	1	100	3.504	1.378
TPE-LB02	3/4"	1	50	4.154	1.614
TPE-LB03	1"	1	50	4.921	1.890
TPE-LB04	1-1/4"	1	20	6.496	2.496
TPE-LB05	1-1/2"	1	20	6.496	2.496
TPE-LB06	2"	1	10	8.563	3.346
TPE-LB07	3"				
TPE-LB07	4"				

**Ⓢ Rigid Conduit Body - LL Type**


**Standard:** UL 514A and CSA C22.2. No. 18.1-13  
**Material:** Aluminum  
**Application:**for rigid conduit or IMC, allow access for inspection,pulling and maintenance

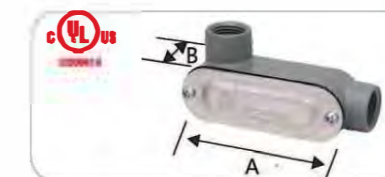

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-LL01	1/2"	1	100	3.504	1.378
TPE-LL02	3/4"	1	50	4.154	1.614
TPE-LL03	1"	1	50	4.921	1.890
TPE-LL04	1-1/4"	1	20	6.496	2.496
TPE-LL05	1-1/2"	1	20	6.496	2.496
TPE-LL06	2"	1	10	8.563	3.346
TPE-LL07	3"				
TPE-LL08	4"				

**Ⓢ Rigid Conduit Body - LR Type**

**Standard:** UL 514A and CSA C22.2. No. 18.1-13  
**Material:** Aluminum  
**Application:**for rigid conduit or IMC, allow access for inspection,pulling and maintenance

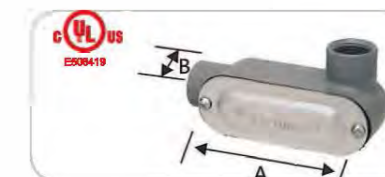

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A(inch)	Dim B (inch)
TPE-LR01	1/2"	1	100	3.504	1.378
TPE-LR02	3/4"	1	50	4.154	1.614
TPE-LR03	1"	1	50	4.921	1.890
TPE-LR04	1-1/4"	1	20	6.496	2.496
TPE-LR05	1-1/2"	1	20	6.496	2.496
TPE-LR06	2"	1	10	8.563	3.346




### Ⓡ Rigid Conduit Body - C Type

**Standard:** UL 514A and CSA C22.2. No. 18.1-13

**Material:** Aluminum

**Application:** for rigid conduit or IMC, allow access for inspection, pulling and maintenance

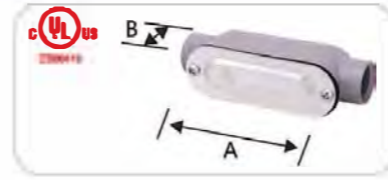


TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
TPE-C01	1/2"	1	100	3.504	1.378
TPE-C02	3/4"	1	50	4.154	1.614
TPE-C03	1"	1	50	4.921	1.890
TPE-C04	1-1/4"	1	20	6.496	2.496
TPE-C05	1-1/2"	1	20	6.496	2.496
TPE-C06	2"	1	10	8.563	3.346
TPE-C07	3"	1	10	8.563	3.346
TPE-C08	4"	1	10	8.563	3.346

### Ⓡ Rigid Conduit Body - T Type

**Standard:** UL 514A and CSA C22.2. No. 18.1-13

**Material:** Aluminum

**Application:** for rigid conduit or IMC, allow access for inspection, pulling and maintenance

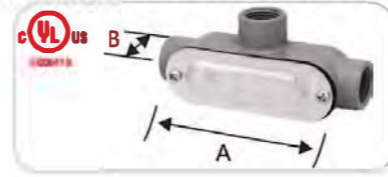

TOPELE#	Trade Size	Shelf QTY	Master QTY	Dim A (inch)	Dim B (inch)
TPE-T01	1/2"	1	100	3.504	1.378
TPE-T02	3/4"	1	50	4.154	1.614
TPE-T03	1"	1	50	4.921	1.890
TPE-T04	1-1/4"	1	20	6.496	2.496
TPE-T05	1-1/2"	1	20	6.496	2.496
TPE-T06	2"	1	10	8.563	3.346
TPE-T07	3"	1	10	8.563	3.346
TPE-T08	4"	1	10	8.563	3.346

### Ⓡ Weatherproof Box Three Gang

**Standard:** UL 514A and CSA C22.2. No. 18.1-13

**Material:** Aluminum

**Application:** for use in branch circuit wiring in wet, damp or dry locations



TOPELE#	Trade Size	Shelf QTY	Master QTY	Width (inch)	Length (inch)	Depth (inch)	Max.Capacity
3GB71	1/2"X7	1	20	4.585	6.319	2.625	54.0cu in / 885ml
3GB72	3/4"X7	1	20	4.585	6.319	2.625	54.0cu in / 885ml
3GB73	1"X7	1	20	4.585	6.319	2.625	54.0cu in / 885ml

**Note:** Boxes supplied with 2 closure plugs, 2 green grounding screw and 2 mounting lugs with self-tapping screws. The color of boxes will be in grey, unless any other color is specified.

### Ⓡ Weatherproof Box Round

**Standard:** UL 514A and CSA C22.2. No. 18.1-13

**Material:** Aluminum

**Application:** for use in branch circuit wiring in wet, damp or dry locations



TOPELE#	Trade Size	Shelf QTY	Master QTY	Width (inch)	Length (inch)	Height (inch)	Max.Capacity
RB50-5	1/2"X5	1	60	4.185	5.492	1.575	15.8cu / in 259ml
RB75-5	3/4"X5	1	60	4.185	5.492	1.575	15.8cu / in 259ml

**Note:** Boxes supplied with 4 closure plugs, 1 green grounding screw and 2 mounting screws for covers. The color of boxes will be in grey, unless any other color is specified.

### Ⓡ Weatherproof Box One Gang

**Standard:** UL 514A and CSA C22.2. No. 18.1-13

**Material:** Aluminum

**Application:** for use in branch circuit wiring in wet, damp or dry locations



TOPELE#	Trade Size	Shelf QTY	Master QTY	Width (inch)	Length (inch)	Depth (inch)	Max.Capacity
FSB50-3	1/2"X3	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-3	3/4"X3	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB100-3	1"X3	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB50-4	1/2"X4	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-4	3/4"X4	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB50-5	1/2"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-5	3/4"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB50-5X	1/2"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
FSB75-5X	3/4"X5	1	60	2.800	4.585	2.000	18.3cu in / 300ml
DB50-3	1/2"X3	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB75-3	3/4"X3	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB100-3	1"X3	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB50-4	1/2"X4	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB75-4	3/4"X4	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB50-5X	1/2"X5	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB75-5X	3/4"X5	1	40	2.800	4.585	2.625	23.8cu in / 390ml
DB100-5X	1"X5	1	40	2.800	4.585	2.625	23.8cu in / 390ml

**Note:** Boxes supplied with 2 closure plugs, 1 green grounding screw and 2 mounting lugs with self-tapping screws. The color of boxes will be in grey, unless any other color is specified.

### Ⓡ Weatherproof Box Two Gang

**Standard:** UL 514A and CSA C22.2. No. 18.1-13

**Material:** Aluminum

**Application:** for use in branch circuit wiring in wet, damp or dry locations



TOPELE#	Trade Size	Shelf QTY	Master QTY	Width (inch)	Length (inch)	Depth (inch)	Max.Capacity
TGB50-3	1/2"X3	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-3	3/4"X3	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-4	1/2"X4	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-4	3/4"X4	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-5	1/2"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-5	3/4"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB100-5	1"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-5X	1/2"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-5X	3/4"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB100-5X	1"X5	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-7	1/2"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-7	3/4"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-7X	1/2"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-7X	3/4"X7	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB50-9	1/2"X9	1	40	4.530	4.530	2.160	30.5cu in / 500ml
TGB75-9	3/4"X9	1	40	4.530	4.530	2.160	30.5cu in / 500ml
DTB50-5	1/2"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB75-5	3/4"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB100-5	1"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB50-5X	1/2"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB75-5X	3/4"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB100-5X	1"X5	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB50-7X	1/2"X7	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB75-7X	3/4"X7	1	40	4.530	4.530	2.625	37.3cu in / 611ml
DTB100-7X	1"X7	1	40	4.530	4.530	2.625	37.3cu in / 611ml

**Note:** Boxes supplied with 2 closure plugs, 1 green grounding screw and 2 mounting lugs with self-tapping screws. The color of boxes will be in grey, unless any other color is specified.